




WELL FLOOR

VINYL FLOORING
LUXURY VINYL TILE

3mmx0.12mm



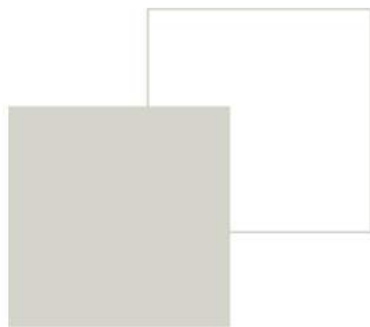

VINYL FLOORING
LUXURY VINYL TILE 3mmx0.12mm
7"x48"(17.78cm x 121.92cm)



7242-2



7274-1



7284-1



7310-2

VINYL FLOORING
LUXURY VINYL TILE 3mmx0.12mm
7"x48"(17.78cm x 121.92cm)



7310-4



7317-7



7365-8



1001-3

VINYL FLOORING
LUXURY VINYL TILE 3mmx0.12mm
7"x48" (17.78cm x 121.92cm)



1001-15



1018-2



VINYL FLOORING LUXURY VINYL TILE



Waterproof



Anti-Termites



Scratch Resistant



Easy to Install



**Abrasion
Resistance**



Easy to Clean



**Comfortable
Underfoot**



Slip Resistance

SPECIFICATIONS:	
ITEM:	Vinyl Flooring Luxury Vinyl Tile
DIMENSION:	7" x48"
TOTAL THICKNESS:	3.0mm
PACKAGING:	16pcs/ 3.46838m ² per box
SURFACETEXTURE:	
WEAR LAYER:	0.12mm

LVT--DRY BACK(LVT)

ITEM	REFERENCE	STANDARD	ITEM	REFERENCE	STANDARD
Appearance	APPEARANCE	ISO 10582	Glossy	Matte: 3--10,n±2 Semi-matte:10--20 Shiny:>20	/
Overall thickness	(-0.10~0.13) mm,±0.15mm	ISO 24346	Scratch resistance	≥2500g	/
Thickness of wear layer	(0,+0.03)mm	ISO 24346	Abrasion loss	≤0.015g/1000r	EN 660-2
EIR error	≤2.0mm	/	Coating volume	8~10g/m ²	/
Dimensions	±0.10mm(4"~9") ±0.30mm(12"~24") ±0.50mm(36"~48")	ISO 24341	Residual indentation	≤0.10mm	ISO 24343-1
Squareness	≤0.20	ISO 24341	Fire classification	B ₁ S ₁	EN 13501
Staightness	≤0.20		Slip resistance	R9	DIN 51130
Gap between	≤0.15	ISO 23999	Color fastness to light	≥6	ISO 105-B02
Dimension stability	≤0.15%(80°C,6h)		Castor chair test	25000 round pass	ISO 4918
Curling	≤1.5mm(80°C,6h)	ISO 24345	Staining resistance	Pass	ISO 26987
Peeling strength	2.0mm:≥45N/5cm 2.5mm:≥50N/5cm 3.0mm:≥65N/5cm				

CITRA ALADDIN SDN BHD

LOT 3687 BLOCK B,BATU 4 1/2,JALAN
SEGAMBUT,51200 KUALA LUMPUR,MALAYSIA

OFFICE: | MOBILE:

EMAIL: | WEBSITE:

